

Kubota



KUBOTA COMPACT EXCAVATOR

KX

KX016-4/KX018-4

Groundbreaking performance. Ultra versatility.
Comfort in a compact environment.

*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.



1.5- and 1.8-tonne excavators digging force tackle tough

Kubota's new KX016-4/KX018-4 mini excavators raise the standard in the 1.5-1.8-tonne category with a powerful digging force and a wider working range that rival higher-end excavators. The premium KX018-4 is engineered for superb handling and

operation from large construction areas to the tightest of places; while the standard KX-016-4 is designed for light-duty use and rentals. Whichever you choose, you can count on Kubota's mini excavators to get the job done easier and better!

Standard Excavator **KX016-4**

- Kubota engine
- Digital panel
- Variable-width undercarriage, fits through gates
- Protected bucket cylinder hoses & auxiliary hydraulic hoses
- Boom cylinder above the boom



Easy to transport (KX016-4)

The compact and lightweight KX016-4 can be towed from site to site quickly and easily, making it an excellent choice for light-duty use* and rentals*. * Below 2000kg



**ors with outstanding
jobs with ease**



Premium Excavator
KX018-4

- Kubota engine
- Digital panel
- Variable-width undercarriage, fits through gates
- Protected bucket cylinder hoses & auxiliary hydraulic hoses
- Boom cylinder above the boom



SUPERIOR PERFORMANCE

Enhanced Digging Force

The powerful and well-balanced arm and bucket let you dig faster and more efficiently even in the toughest conditions.

Extraordinary Stability and Lifting Capacity

The long tumbler distance and wide variable track width provide superior stability so you can perform safely with Kubota attachments. And Kubota's hydraulic system and powerful boom cylinder deliver the lifting power you need for a wide range of jobs. Combined, you get an advanced hydraulic system that automatically regulates and distributes the optimum amount of oil to each cylinder based on the weight of the load, for smooth, responsive and stable lifting capacity and operation.

Variable Track Gauge

To optimise stability when using heavy attachments, the tracks can be expanded up to 1,300mm and retracted to 990mm to make passing through narrow doorways and tight passages possible. Adjustments can be made in just seconds with the independent track gauge lever.



Auto-shift (KX018-4)

The auto-shift system for the KX018-4 enables automatic travel shift from high to low depending on traction effort and terrain. This gives smoother operations when dozing and turning.

Wide Working Range

With a wide range of powerful working applications for digging, lifting and loading, the KX016-4/KX018-4 are always hard at work for you. Plus, the increased efficiency of our bucket capacity, digging depth and load over height meet or exceed the requirements of today's construction sites.

Kubota Original Engines

Kubota's impressive D902 17 PS engine for the KX018-4 and D782 13 PS engine for the KX016-4 are engineered for maximum digging and lifting performance. They also deliver minimised noise and vibration, and meet the latest engine emission regulation.



**6%
More Digging
Power!**



Short-pitched Rubber Crawler and Double-flanged Track Rollers (KX018-4)

The short-pitched rubber crawler minimises vibration and double-flanged rollers that help improve stability and travel performance.

Straight Travel

For added safety, Kubota's hydraulic system makes sure that you travel in a straight line even during simultaneous operation of the front boom, arm and bucket.

WORK IN COMFORT



A. Flat Foot Space

The flat foot space enhances comfort by providing ample leg room to reduce fatigue even during long hours of operation.

B. 2-speed Travel Switch

By placing the 2-speed travel switch on the dozer lever, dozing operations can be done faster and easier.



C. Cup Holder

With the convenience of a bigger cup holder, you can quench your thirst and work longer without leaving your seat.

D. Adjustable Wrist Rest

A thoughtfully designed wrist rest enhances operation and reduces operator fatigue.

E. Weight-adjustable Suspension Seat

Designed for better fit and comfort even for long hours of work, Kubota's high-back suspension seat minimises strain and operator fatigue by accommodating your individual posture and weight. It also includes adjustable wrist rests and a seatbelt.

TPSS

The Two-Pattern Selection System positioned under the seat lets you shift control styles conveniently while seated. A simple turn of a switch is all it takes to select between the ISO pattern and the SAE backhoe pattern.

ROPS and FOPS Certified Canopy

Lightweight for improved stability and certified for safety, the ROPS & FOPS safety systems provide protection from falling debris or accidental rollovers.

More Legroom

Designed for greater comfort, the fully flat floor provides more legroom to minimise fatigue.

New Digital Panel

The new user-friendly digital panel puts convenience at your fingertips. Positioned to the front right corner of the operator for better visibility and accessibility, it features easy one-touch button operation to view the time, hour meter and tachometer. Warning lamps with code numbers on the display will alert you in case of emergencies such as overheating, hydraulic problems or low battery.



1. Fuel Level Gauge


2. Water Temperature Gauge

3. Warning Lamps

(Engine oil pressure, Battery charge, Coolant temperature)

4. LCD Display (Time, Hour, rpm)


Time



Hour Meter




Tachometer



Engine Maintenance

Kubota has made routine maintenance extremely simple by consolidating primary engine components onto one side for easier access. Engine and other vital components can be inspected quickly and easily.

- A.** Air Cleaner
- B.** Water Separator
- C.** Fuel Filter
- D.** Alternator
- E.** Starter Motor
- F.** Engine Oil Filter

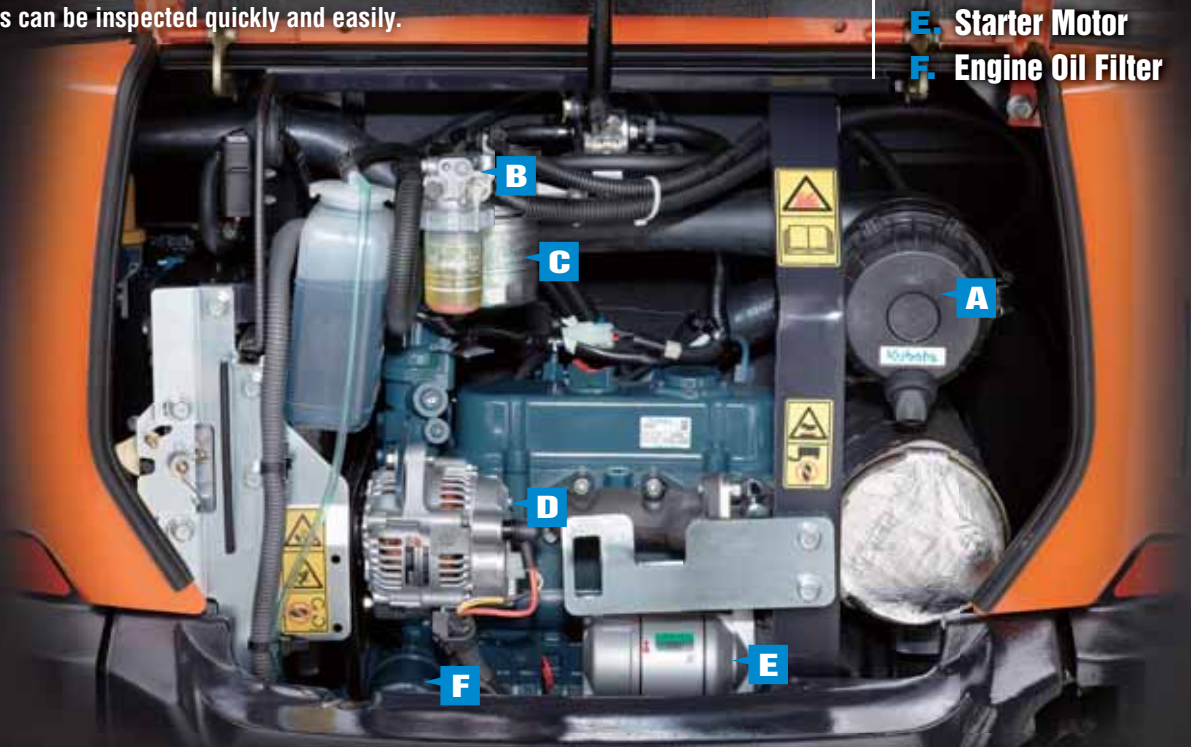

MAINTENANCE & SAFETY

Topside Boom Cylinder

For increased reliability when performing in hazardous conditions, including demolition jobs when a breaker is fitted, the boom cylinder has been positioned on the topside of the boom to prevent cylinder damage.



Integrated Travel Motor Hoses

Kubota has enclosed the travel motor hoses within the track frame for added protection.



Easy lubrication

Boss lubrication replaces the previous pin method to make lubrications more convenient when exchanging attachments.



KX016-4/KX018-4 OPTIONS & EQUIPMENT

● Hydraulic hitch



● Canopy lights



● Buckets



WORKING RANGE

Model			KX016-4	KX018-4
A	Max. digging height	mm	3360	3460
B	Max. dumping height	mm	2290	2380
C	Max. digging depth	mm	2250	2380
D	Max. vertical digging depth	mm	1810	2030
E	Max. digging radius, at ground level	mm	3730	3860
F	Max. digging radius	mm	3790	3920
G	Min. turning radius	W/o swing	1490	1480
		With swing	1180	1170
H	Min. tail turning radius	mm	1070	1070



LIFTING CAPACITY

LIFT POINT HEIGHT (m)	LIFTING CAPACITY OVER THE FRONT, BLADE DOWN unit=kN					LIFTING CAPACITY OVER THE SIDE, TRACK WIDTH 1240mm unit=kN				
	LIFT POINT RADIUS (m)					LIFT POINT RADIUS (m)				
	1.0	1.5	2.0	2.5	3.0	1.0	1.5	2.0	2.5	3.0
2.5	-	-	-	-	-	-	-	-	-	-
2.0	-	-	-	2.6	-	-	-	-	2.5	-
1.0	-	-	4.5	3.5	2.9	-	-	3.2	2.4	1.8
0	-	4.7	5.3	3.8	2.8	-	4.4	2.9	2.2	1.7
-1.0	8.5	5.9	4.0	2.8	-	8.5	4.4	2.8	2.2	-
GL	-1.5	-	4.3	2.8	-	-	4.3	2.8	-	-

KX018-4

LIFT POINT HEIGHT (m)	LIFTING CAPACITY OVER THE FRONT, BLADE DOWN unit=kN					LIFTING CAPACITY OVER THE SIDE, TRACK WIDTH 1240mm unit=kN				
	LIFT POINT RADIUS (m)					LIFT POINT RADIUS (m)				
	1.0	1.5	2.0	2.5	3.0	1.0	1.5	2.0	2.5	3.0
2.5	-	-	-	2.6	-	-	-	-	2.6	-
2.0	-	-	-	2.5	-	-	-	-	2.5	-
1.0	-	6.5	4.3	3.5	3.0	-	6.5	4.3	3.1	2.4
0	-	6.1	5.8	4.1	3.1	-	6.1	4.0	2.9	2.3
-1.0	9.1	6.8	4.5	3.2	-	9.1	6.3	3.9	2.8	-
GL	-1.5	11.4	5.2	3.4	-	-	11.4	5.2	3.4	-

Machine with standard arm without bucket, rubber crawler, ROPS canopy and standard track width.

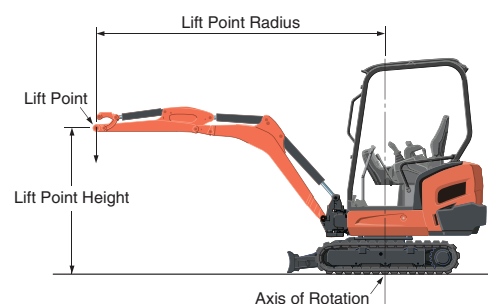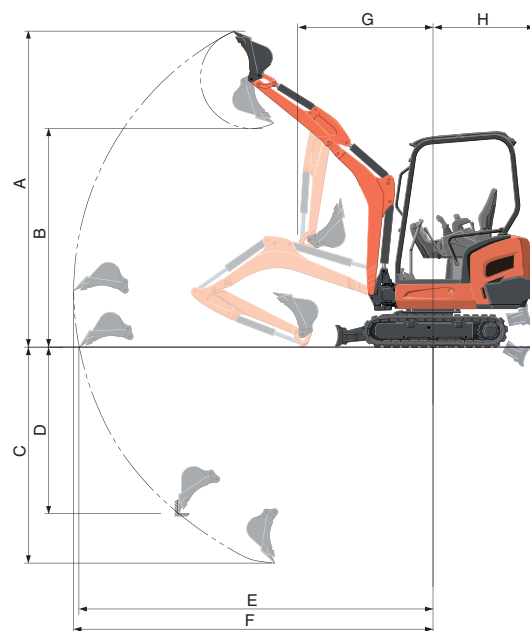

SPECIFICATIONS


Model				KX016-4	KX018-4
Type of ROPS / FOPS				Canopy	Canopy
Type of tracks				Rubber	Rubber
Engine	Model			Kubota D782-BH	Kubota D902-BH
	Output (SAEJ 1995 gross)	HP (kW)/rpm		13.7 (10.2) / 2300	17.0 (12.7) / 2300
	Output (SAEJ 1349 net)	HP (kW)/rpm		12.2 (9.1) / 2300	15.2 (11.3) / 2300
	Displacement	cc		778	898
Dimensions	Overall length	mm		3710	3710
	Overall height	mm		2330	2330
	Overall width	mm		1240 / 990	1300 / 990
	Min. ground clearance	mm		160	160
Hydraulic system	Pump capacity	ℓ/min		17.3 × 2 / 10.4 × 1 / 6.2 × 1	17.3 × 2 / 10.4 × 1 / 6.2 × 1
	Auxiliary hydraulic flow	ℓ/min		27.7	27.7
	Max. breakout force	Bucket / Arm	kgf	1370 / 740	1630 / 840
Drive system	Travel speed	Low / High	km/h	2.1 / 3.8	2.2 / 4.0
	Max. traction force		kgf	2207	2207
	Tumbler distance		mm	1090	1230
	Crawler length		mm	1585	1585
	Shoe width		mm	230	230
	Ground contact pressure		kgf/cm ²	0.26	0.26
Swing system	Unit swing speed		rpm	9.1	9.1
	Boom swing angle	Left / Right	degree	75 / 60	75 / 60
Blade	Dimensions	Width	mm	1240 / 990	1300 / 990
		Height	mm	230	230
	Max. lift above ground		mm	240	230
	Max. drop below ground		mm	230	230
Hydraulic oil (reservoir / system)				ℓ	15.5 / 28
Fuel reservoir				ℓ	21
Operating weight (Including operator's weight 80 kg)				kgf	1570
					1700

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only.

Please contact your local Kubota dealer for warranty information.

For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

DIMENSIONS

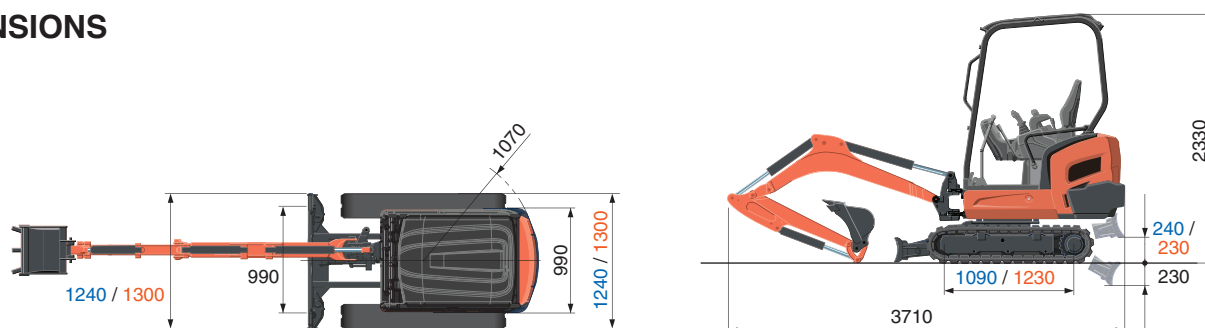

KX016-4 / KX018-4
 KX016-4
 KX018-4
 Unit: mm

©2012 Kubota Corporation



KUBOTA Australia Pty Ltd

25-29 Permas Way, TRUGANINA Vic, 3029
 Freecall: 1800 334 653
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

Kubota New Zealand Limited

Freecall: 0800-582-682
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.co.nz>